

P.M.H.



ACCESSORIES

P.M.H. Design s.r.o. is a manufacturer of bathroom radiators and electric towel dryers. The full product range is available at: www.pmh-co.cz

ORDERS, SUPPORT & SALES

Orders are accepted only in writing via email at: info@pmh-co.cz

Order confirmation is always sent in writing.
If you do not receive confirmation within 3 days, the order is not considered accepted. Please resend it with the note "ordered again".

Sales department phone: +420 380 711 237

WARRANTY

Warranty periods and exclusions are governed by the terms and conditions available on our website.

Bathroom radiators: 5-year warranty

Electric towel dryers, heating elements, valves, and accessories: 2-year warranty

CLAIMS

Product claims are handled according to the complaint procedure on our website. Claims are accepted only via email: reklamace@pmh-co.cz

RETURNS & ORDER CANCELLATION

Conditions follow the general terms and conditions on our website. Returns and cancellations must be approved by the supplier. Returned goods must be: unused, undamaged and in original packaging. A cancellation fee of 10% of the retail price (excluding VAT) will be charged.


Technical changes, typographical errors, and printing errors reserved. Photos are illustrative only. P.M.H. Design reserves the right to change prices and specifications without prior notice.



VALVES

VALVES

FOR COMBINED HEATING WITH AN ELECTRIC HEATING ELEMENT OR CENTRAL HEATING




For combined heating, it is necessary to order: radiator + valve + heating element.
For central heating, it is necessary to order: radiator + valve



Set NOVA	Chrome	Black	White	Stainless steel
RIGHT	NOV-R-C	NOV-R-B	NOV-R-W	NOV-R-SS
LEFT	NOV-L-C	NOV-L-B	NOV-L-W	NOV-L-SS



NOV-L-W




For combined heating, it is necessary to order: radiator + valve + heating element.
For central heating, it is necessary to order: radiator + valve

CONNECTION: SUPPLY ↑ RETURN ↓

NURA



Set NURA	Chrome	Black	White	Stainless steel
RIGHT	NUR-R-C	NUR-R-B	NUR-R-W	NUR-R-SS
LEFT	NUR-L-C	NUR-L-B	NUR-L-W	NUR-L-SS

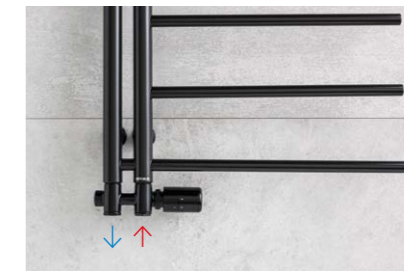


NUR-R-B



KIRA



Set KIRA	Chrome	Black	White	Stainless steel
RIGHT	KIR-R-C	KIR-R-B	KIR-R-W	KIR-R-SS
LEFT	KIR-L-C	KIR-L-B	KIR-L-W	KIR-L-SS

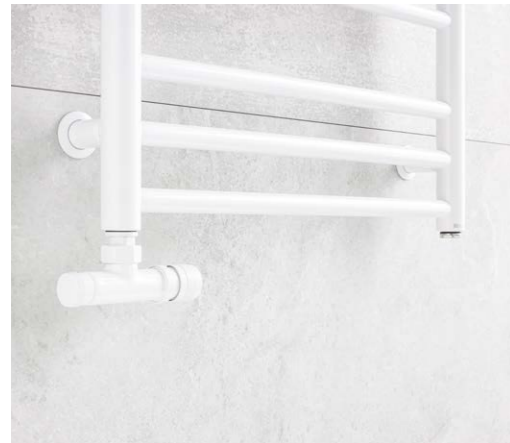


KIR-L-W



TERRA



Set TERRA	Chrome	Black	White	Stainless steel
RIGHT	TER-R-C	TER-R-B	TER-R-W	TER-R-SS
LEFT	TER-L-C	TER-L-B	TER-L-W	TER-L-SS

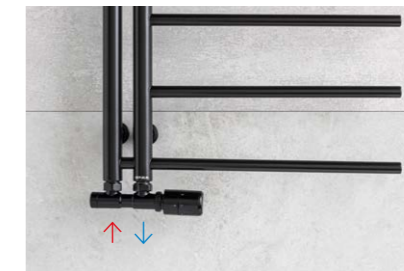

TER-R-B



MIRA



Set MIRA	Chrome	Black	White	Stainless steel
RIGHT	MIR-R-C	MIR-R-B	MIR-R-W	MIR-R-SS
LEFT	MIR-L-C	MIR-L-B	MIR-L-W	MIR-L-SS




MIR-L-W



SIRA



Set SIRA	Chrome
RIGHT	SIR-R-C

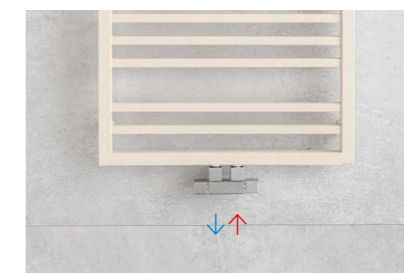


SIR-R-C



VALVE


FOR COMBINED HEATING WITH AN ELECTRIC HEATING ELEMENT OR CENTRAL HEATING



For combined heating, it is necessary to order: radiator + valve + heating element.
For central heating, it is necessary to order: radiator + valve.



Set LORA	Chrome	Black	White	Stainless steel
RIGHT	LOR-R-C	LOR-R-B	LOR-R-W	LOR-R-SS
LEFT	LOR-L-C	LOR-L-B	LOR-L-W	LOR-L-SS

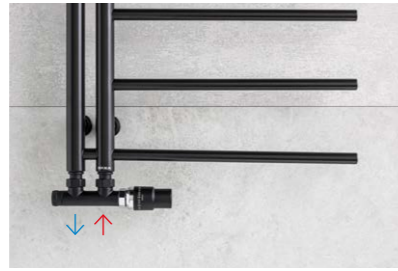


LOR-R-B



VALORA



Set VALORA	Chrome	Black	White	Stainless steel
RIGHT	VAL-R-C	VAL-R-B	VAL-R-W	VAL-R-SS
LEFT	VAL-L-C	VAL-L-B	VAL-L-W	VAL-L-SS

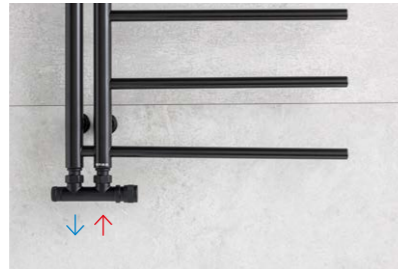


VAL-R-B



UNI



Set UNI	Chrome	White
UNI	UNI-U-C	UNI-U-W

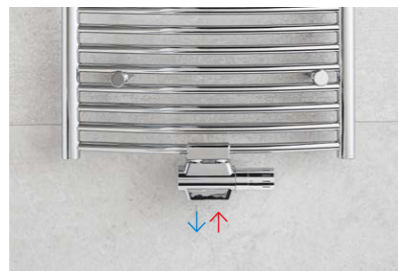


UNI-U-C



DUO




* Floor connection



For combined heating, it is necessary to order: radiator + valve + heating element.
For central heating, it is necessary to order: radiator + valve.



Set DUO	Chrome	Black
	DUO-U-C	DUO-U-B

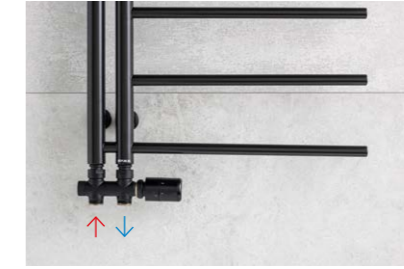

DUO-U-B




CONNECTION: SUPPLY ↑ RETURN ↓

RUNA



Set RUNA	Chrome	Black	White	Stainless steel
RIGHT	RUN-R-C	RUN-R-B	RUN-R-W	RUN-R-SS
LEFT	RUN-L-C	RUN-L-B	RUN-L-W	RUN-L-SS

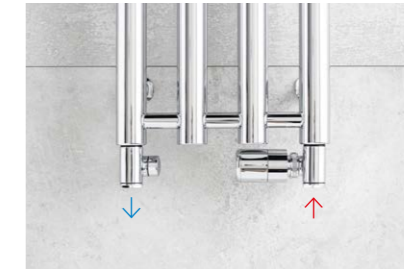


RUN-R-C



SONA



Set SONA	Chrome
RIGHT	SON-R-C

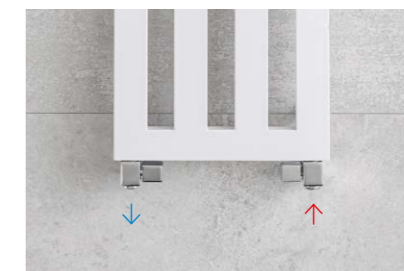


SON-R-C




VALVE

FOR CENTRAL HEATING



For central heating, it is necessary to order: a radiator + a valve.





For central heating, it is necessary to order: a radiator + a valve.

CONNECTION: SUPPLY ↑ RETURN ↓

DORIA



Set DORIA	Chrome	Black	White	Stainless steel
RIGHT	DOR-R-C	DOR-R-B	DOR-R-W	DOR-R-SS
LEFT	DOR-L-C	DOR-L-B	DOR-L-W	DOR-L-SS

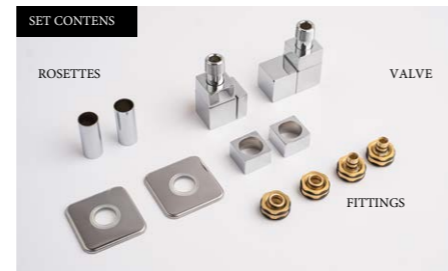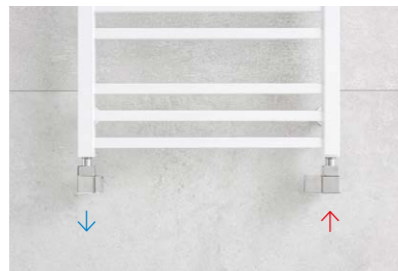


DOR-R-C

FLORA



Set FLORA	Chrome	Black	White	Stainless steel
RIGHR	FLO-R-C	FLO-R-B	FLO-R-W	FLO-R-SS
LEFT	FLO-L-C	FLO-L-B	FLO-L-W	FLO-L-SS

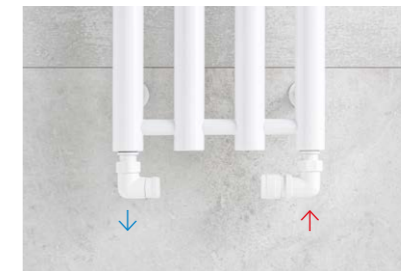


FLO-R-W

LUNA



Set LUNA	Chrome	Black	White	Stainless steel
	LUN-U-C	LUN-U-B	LUN-U-W	LUN-U-SS

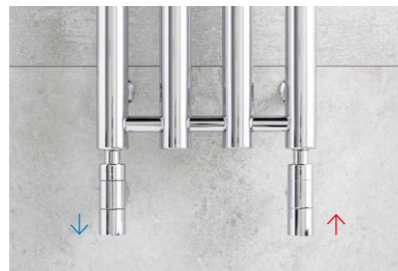

LUN-U-C

ROYAL



Set ROYAL	Chrom	Black
	ROY-U-C	ROY-U-B



ROY-U-B

* Floor connection

SIGMA



Set SIGMA	Chrome	Black	White	Stainless steel
RIGHT	SIG-R-C	SIG-R-B	SIG-R-W	SIG-R-SS
LEFT	SIG-L-C	SIG-L-B	SIG-L-W	SIG-L-SS




SIG-R-C

ZORA



Set ZORA	Chrome
	ZOR-U-C

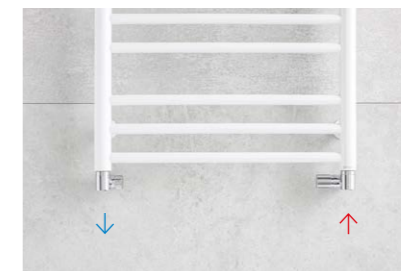

ZOR-U-C

PŘEHLED VENTILŮ

Set	middle 50 mm	one side 50 mm	C/C	Therm. head	possible to put heating element through	corner connection	floor connection
DORIA			•			•	
DUO	•			•			•
FLORA			•			•	
KIRA		•				•	
LORA	•			•		•	
LUNA			•			•	
MIRA		•		•		•	
NOVA		•		•		•	
NURA	•			•	•	•	
ROYAL			•	•			•
RUNA			•	•	•	•	
SIGMA			•	•		•	
SIRA	•					•	
SONA			•		•	•	
TERRA	•			•		•	
UNI	•			•		•	•
VALORA	•					•	
ZORA			•			•	

Chrome	Stainless steel	Black - coating	White - coating	compatible radiators
•	•	•	•	Avento, Avento Frame, Danby, Darius, Galeon, Laveno, Luxor, Naas, Pegasus, Pluto, Rosendal, Rosendal Massive, Sorano, Sorano Frame, Theia, Ulysses
•		•		Apollo, Avento Frame, Danby, Naas, Kronos, Pegasus, Sorano Frame
•	•	•	•	Avento, Avento Frame, Danby, Darius, Galeon, Laveno, Luxor, Naas, Pegasus, Pluto, Rosendal, Rosendal Massive, Sorano, Sorano Frame, Ulysses Theia*
•	•	•	•	Avento, Avento Frame, Danby, Darius, Galeon, Laveno, Luxor, Naas, Pegasus, Pluto, Rosendal, Rosendal Massive, Sorano, Sorano Frame, Theia, Ulysses,
•	•	•	•	Apollo, Avento Frame, Danby, Naas, Kronos, Pegasus, Sorano Frame
•	•	•	•	Avento, Avento Frame, Danby, Darius, Galeon, Laveno, Luxor, Naas, Pegasus, Pluto, Rosendal, Rosendal Massive, Sorano, Sorano Frame, Theia, Ulysses
•	•	•	•	Avento, Avento Frame, Danby, Darius, Galeon, Laveno, Luxor, Naas, Pegasus, Pluto, Rosendal, Rosendal Massive, Sorano, Sorano Frame, Theia, Ulysses
•	•	•	•	Apollo, Avento Frame, Danby, Naas, Kronos, Pegasus, Sorano Frame
•		•		Avento, Avento Frame, Danby, Darius, Galeon, Laveno, Luxor, Naas, Pegasus, Pluto, Rosendal, Rosendal Massive, Sorano, Sorano Frame, Theia, Ulysses
•	•	•	•	Avento, Avento Frame, Danby, Darius, Galeon, Laveno, Luxor, Naas, Pegasus, Pluto, Rosendal, Rosendal Massive, Sorano, Sorano Frame, Ulysses Theia*
•	•	•	•	Avento, Avento Frame, Danby, Darius, Galeon, Laveno, Luxor, Naas, Pegasus, Pluto, Rosendal, Rosendal Massive, Sorano, Sorano Frame, Ulysses Theia*
•				Apollo, Avento Frame, Danby, Naas, Kronos, Pegasus, Sorano Frame,
•				Avento, Avento Frame, Danby, Darius, Galeon, Laveno, Luxor, Naas, Pegasus, Pluto, Rosendal, Rosendal Massive, Sorano, Sorano Frame, Theia, Ulysses
•	•	•	•	Apollo, Avento Frame, Danby, Naas, Kronos, Pegasus, Sorano Frame
•			•	Apollo, Avento Frame, Danby, Naas, Kronos, Pegasus, Sorano Frame
•	•	•	•	Apollo, Avento Frame, Danby, Naas, Kronos, Pegasus, Sorano Frame
•				Avento, Avento Frame, Danby, Darius, Galeon, Laveno, Luxor, Naas, Pegasus, Pluto, Rosendal, Rosendal Massive, Sorano, Sorano Frame, Theia, Ulysses

Notes:
Theia* – valve components will be supplied in the opposite configuration.
For example, if you order Theia T2, the valve will be in the left-hand version. If you order T2-L, the valve will be in the right-hand version.





ELECTRIC HEATING ELEMENTS

ELECTRIC HEATING ELEMENTS

HT

Heating element HT

- 4-stage temperature regulation in the range of 30° – 60°C
- dryer function
- timer START-STOP– after 2h electric heating element will automatically turn off (activated by pressing and holding the „timer” button for approx. 4 sec.)
- timer TURBO – after 2h electric heating element will return to the previous settings (activated by pressing the „timer” button)

- two-level overheating protection
- additional protection against working when ”dry”
- low power consumption in standby mode (Ultra-Low-Power)
- ANTIFREEZE function (protection against freezing of the liquid inside of the towel warmer)
- intelligent work control – microprocessor control
- visualization in colorful LED technology
- controller rotation in the range of 0° – 330°



PMH-HT2

Output [W]	order code chrome	order code white	order code metallic silver	order code black
120	PMH-HT2-C-120W	–	–	–
200	PMH-HT2-C-200W	PMH-HT2-W-200W	PMH-HT2-MS-200W	PMH-HT2-B-200W
300	PMH-HT2-C-300W	PMH-HT2-W-300W	PMH-HT2-MS-300W	PMH-HT2-B-300W
400	PMH-HT2-C-400W	PMH-HT2-W-400W	PMH-HT2-MS-400W	PMH-HT2-B-400W
500	PMH-HT2-C-500W	PMH-HT2-W-500W	PMH-HT2-MS-500W	PMH-HT2-B-500W
600	PMH-HT2-C-600W	PMH-HT2-W-600W	PMH-HT2-MS-600W	PMH-HT2-B-600W
800	PMH-HT2-C-800W	PMH-HT2-W-800W	PMH-HT2-MS-800W	PMH-HT2-B-800W



PMH-HT2 - RK

Output [W]	order code chrome	order code white	order code metallic silver	order code black
200	PMH-HT2-C-200W-RK	PMH-HT2-W-200W-RK	PMH-HT2-MS-200W-RK	PMH-HT2-B-200W-RK
300	PMH-HT2-C-300W-RK	PMH-HT2-W-300W-RK	PMH-HT2-MS-300W-RK	PMH-HT2-B-300W-RK
400	PMH-HT2-C-400W-RK	PMH-HT2-W-400W-RK	PMH-HT2-MS-400W-RK	PMH-HT2-B-400W-RK
500	PMH-HT2-C-500W-RK	PMH-HT2-W-500W-RK	PMH-HT2-MS-500W-RK	PMH-HT2-B-500W-RK
600	PMH-HT2-C-600W-RK	PMH-HT2-W-600W-RK	PMH-HT2-MS-600W-RK	PMH-HT2-B-600W-RK
800	PMH-HT2-C-800W-RK	PMH-HT2-W-800W-RK	PMH-HT2-MS-800W-RK	PMH-HT2-B-800W-RK

PMH-HT1

Topná tyč určená k přímému napojení elektrického kabelu vyvedeného ze zdi.



Output [W]	order code chrome	order code white	order code metallic silver	order code black
200	PMH-HT1-C-200W	PMH-HT1-W-200W	PMH-HT1-MS-200W	PMH-HT1-B-200W
300	PMH-HT1-C-300W	PMH-HT1-W-300W	PMH-HT1-MS-300W	PMH-HT1-B-300W
400	PMH-HT1-C-400W	PMH-HT1-W-400W	PMH-HT1-MS-400W	PMH-HT1-B-400W
500	PMH-HT1-C-500W	PMH-HT1-W-500W	PMH-HT1-MS-500W	PMH-HT1-B-500W
600	PMH-HT1-C-600W	PMH-HT1-W-600W	PMH-HT1-MS-600W	PMH-HT1-B-600W
800	PMH-HT1-C-800W	PMH-HT1-W-800W	PMH-HT1-MS-800W	PMH-HT1-B-800W

NEX

Heating element NEX

- if the electric heating element has stable WiFi connection, it can be controlled from anywhere in the world, all you need is Internet access
- remote control via the application on a mobile device or locally by pushing the buttons
- weekly schedule – ability to set the radiator temperature, or the room temperature
- measuring the room temperature/ stopping the heating function for the time the window/door is open
- TURBO timer / START-STOP timer
- temperature regulation in the radiator in the range of 30°–60°C (from the application with an accuracy of 1°C)
- room temperature regulation in the range of 17°C – 24°C (from the application with an accuracy of 0,1°C)

- The correction may be +4C to -4C.
- counter for amount and cost of energy used – based on entered data the application calculate the cost of device
- controller rotation in the range of 0° – 330°
- ANTIFREEZE function protection against freezing of the medium in the radiator
- two-level overheating protection
- low power consumption in standby mode (Ultra-Low-Power)
- dryer function
- intelligent work control – microprocessor control
- visualization in colorful LED technolog




Application App Store/
Google play

Smart Life / Tuya Smart/
Alexa/ Google Home



integrated temperature
sensor

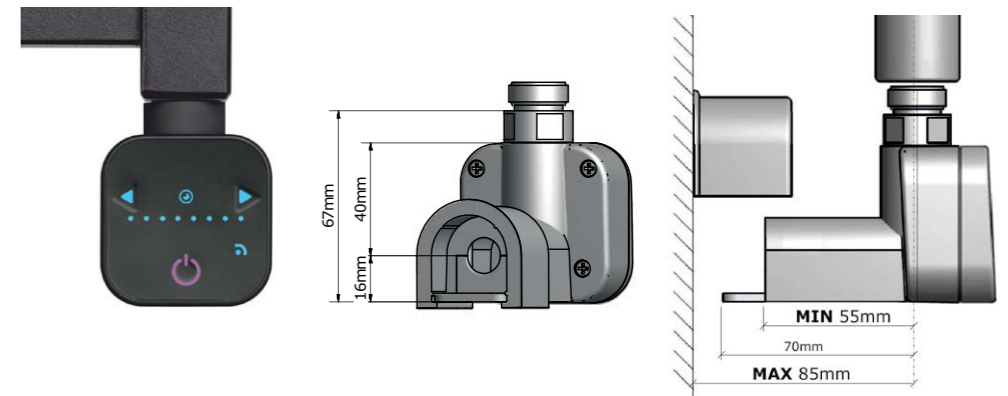

PMH-NEX1

Output [W]	Order code white	Order code metallic silver	Order code black
200	PMH-NEX1-W-200W	PMH-NEX1-MS-200W	PMH-NEX1-B-200W
300	PMH-NEX1-W-300W	PMH-NEX1-MS-300W	PMH-NEX1-B-300W
400	PMH-NEX1-W-400W	PMH-NEX1-MS-400W	PMH-NEX1-B-400W
500	PMH-NEX1-W-500W	PMH-NEX1-MS-500W	PMH-NEX1-B-500W
600	PMH-NEX1-W-600W	PMH-NEX1-MS-600W	PMH-NEX1-B-600W
800	PMH-NEX1-W-800W	PMH-NEX1-MS-800W	PMH-NEX1-B-800W

ELECTRIC HEATING ELEMENT

ET2

Heating element ET2

- reacts to the temperature of the heating medium in the radiator
- temperature control: 5–65 °C
- IP44. The coiled cable length is 1.3 m
- circular indicator of heating element operation
- rubber seal prevents water leakage



ET2

Output [W]	Order code chrome	Order code white	Order code metallic silver	Order code black	Order code black-matt
150	PMH-ET2-C-150W	PMH-ET2-W-150W	PMH-ET2-MS-150W	PMH-ET2-B-150W	PMH-ET2-BL-150W
300	PMH-ET2-C-300W	PMH-ET2-W-300W	PMH-ET2-MS-300W	PMH-ET2-B-300W	PMH-ET2-BL-300W
600	PMH-ET2-C-600W	PMH-ET2-W-600W	PMH-ET2-MS-600W	PMH-ET2-B-600W	PMH-ET2-BL-600W

ST

Heating element ST

- maintenance-free
- heating element finishes: INOX (stainless steel), with white or grey power cable
- stainless steel housing
- maximum radiator temperature limiter: 65 °C
- symmetrical housing for right- or left-hand installation
- enables integration with external timers or smart building systems
- thermal protection in case the heating element is switched on dry (without water)



ST

Output [W]	Order code white	Order code metallic silver
150	PMH-ST-W-150W	PMH-ST-MS-150W
200	PMH-ST-W-200W	PMH-ST-MS-200W
300	PMH-ST-W-300W	PMH-ST-MS-300W
400	PMH-ST-W-400W	PMH-ST-MS-400W
500	PMH-ST-W-500W	PMH-ST-MS-500W
600	PMH-ST-W-600W	PMH-ST-MS-600W
800	PMH-ST-W-800W	PMH-ST-MS-800W

Overview of heating elements

Heating elements	NEX1	HT	ET2	ST
Function				
Timer START-STOP	•	•		
Timer TURBO	•	•		
Device operating schedule	•			
Temperature sensor	•			
Open window/door sensor	•			
ANTIFREEZE function	•	•		
Overheating protection	•	•	•	•
Application available iOS and Android	•			
Radio communication	•			
Temperature regulation in the room	Temperature control with an accuracy of 1 °C within the range of 17–24 °C			
Temperature regulation in the radiator	Temperature control with an accuracy of 1 °C within the range of 30–60 °C	4 levels of temperature control within the range 30–60 °C	5 levels of temperature control within the range 5–65 °C	without regulation
Dryer function	•	•		
Controller rotation in the range of 0°–330°	•	•		
Ultra-Low-Power function	•	•		
Microprocessor control	•	•		
Intelligent work control - visualization in colourful LED technology	•	•		
Color of thermostat	White, black, metallic silver	White, black, chrom metallic silver	White, black, chrome, metallic silver	White-cable, metallic silver -cable

Technical parameters

Ingress protection (IP)	IPX5	IPX5	IPX4	IP67
Appliance class available in two options	Třída I	Třída I	Třída I	Třída I
Connection of radiators	1/2"	1/2"	1/2"	1/2"
Power	200W, 300W, 400W, 500W, 600W, 800W	120W, 200W, 300W, 400W, 500W, 600W, 800W	150W, 300W, 600W	150W, 200W, 300W, 400W, 500W, 600W, 800W
Type of connection: spiral cable		•	•	
Type of connection: straight cable		•		•
Type of connection: masking cable	•	•		

NOTES:





P.M.H. Design s.r.o.
Přísečná 556
CZ 381 01 Český Krumlov

T: 00420 380 711 237
E: info@pmh-co.cz

www.pmh-co.cz

